

▪ FIELD OF APPLICATION

Industrial sewing machines of various manufacturers especially for the following sewing machines:

Brand	Series
PFAFF	All lockstitch machines with thread trimmer 900 (el.-magn. and el.-pneum.)

With connections and/or outputs for:

Thread trimmer/magn.	(max. 3.0A)
Thread trimmer/pneum.	(max. 3.0A)
Presser foot lifting	(max. 6.5A/3.0A)
Needle cooling	(max. 3.0A)

The total power of the outputs is to be limited to 96VA!

Reflection light barrier module for the sensing of the edge of the fabric

Power supply 24V d.c., max. 0.5A for further additional devices

▪ CHARACTERISTICS

The control has a digital touch control panel for programming all parameters (functions, times, speeds, etc.). Moreover, a reflection light barrier module LSM001 can be connected to the control (part nos. see Special Accessories).

▪ THE FOLLOWING FUNCTIONS ARE AVAILABLE AND CAN BE ADAPTED TO THE MACHINE:

- **SOFTSTART:** On/off; number of stitches and speed at the start of the seam can be set (factory setting: 2 stitches / 400 RPM).
- **BASIC POSITION:** Needle position at stop in the seam up/down.
- **BRAKING POWER AT MACHINE STANDSTILL:** Braking effect can be set.
- **PRESSER FOOT LIFTING:** At stop in the seam automatic/by pedal, after thread trimming automatic/by pedal, start delay after switching off the presser foot lift signal can be set.
- **THREAD TRIMMER:** Can be switched on and off on the control.
- **SPEED RANGE:** 70 RPM to 9900 RPM (depending on machine).
- **SPEED LIMITATION:** Can be varied during machine run and at intermediate stop.

▪ If THE LIGHT BARRIER IS NOT CONNECTED, THE LIGHT BARRIER INPUT CAN BE USED FOR THE FOLLOWING TOUCH AND/OR SWITCHING FUNCTIONS:

- | | |
|--|--|
| - NEEDLE POSITION UP/DOWN | - BLOCKING OF MACHINE RUN: positioned stop; break contact [N.C.]/make contact [N.O.] selectable |
| - NEEDLE POSITION UP | - BLOCKING OF MACHINE RUN: unpositioned stop; break contact [N.C.]/make contact [N.O.] selectable |
| - SINGLE STITCH: basting stitch | - AUTOMATIC SPEED |
| - FULL STITCH | - LIMITED SPEED WHEN PUSHING THE PEDAL |
| - NEEDLE TO POSITION 2 | - PRESSER FOOT UP |

By means of the internal actuator 12 speed stages are switched. Stage 1 (positioning speed) and stage 12 (maximum speed) can be set. The maximum speed of the set value can be reduced by stages. The basic setting of the maximum speed is not modified. Stages 2...11 (intermediate speeds) adapt automatically to the respective maximum speed.

▪ UNIT CONSISTING OF

- | | |
|--|---|
| 1 induction motor with electromagnetic clutch type V.... *1) | 1 set of standard accessories B10 (consisting of): |
| 1 electronic control type 8B81A with power pack type N30 | 1 belt guard, complete (for pulleys up to 132 mm ϕ) |
| 1 position transmitter type P5-2 | 1 set of hardware |
| | 1 motor mounting foot |
| | 1 bracket 1 and 2, short |
| | 1 documentation |
| | 1 set of accessories Z8 (consisting of): |
| | 1 pitman rod, complete |
| | 1 6-pin plug (Mes60) |
| | 1 pulley DIN42692-L (size according to request) |

▪ SPECIAL ACCESSORIES - SEE REVERSE:

*1) Available motors see last page

■ SPECIAL ACCESSORIES, AGAINST EXTRA CHARGE:	Part No.
<p>Belt guard (for pulleys up to 180mmϕ) Reflection light barrier module LSM001 Reflection light barrier Variolux LS-001-004 (only in conjunction with V730) Solenoid type EM1.. (for e.g. presser foot lift, etc.)</p> <p>Extension cable for external actuator, approx. 750 mm long, complete with plug and socket connector Extension cable for external actuator, approx. 1500 mm long, complete with plug and socket connector 5-pin plug with locking screw for the connection of another external actuator External actuator type EB301 with approx. 250 mm connecting cable and 5-pin plug with locking screw External actuator type EB302 (softer spring) with approx. 250 mm connecting cable and 5-pin plug with locking screw Foot control type FB301 with one pedal for standing operation with approx. 1400 mm connecting cable and plug Foot control type FB302 with three pedals for standing operation with approx. 1400 mm connecting cable and plug Potential equalization cord 700 mm long, LIY 2.5 mm², grey with forked cable brackets on both sides Extension cable for position transmitter P5-., approx. 1100 mm long, complete with plug and socket connector Extension cable for position transmitter P5-., approx. 315 mm long, complete with plug and socket connector Knee switch type KN3 (pushbutton) with cord of approx. 950 mm length without plug, for switching the functions overleaf Sewing light transformer</p> <p>6-pin plug with locking screw (Mas 6100) 6-pin plug (Mes 60)</p>	<p>7960012 6100028 6100007 available versions see specification "solenoids" 1111845 1111787 0501278 41.0011 41.0012 4170013 4170018 1100313 1111584 1111229 58.0013 please indicate line voltage and sewing light voltage (6.3V or 12V) 0500703 0500457</p>

Efka

FRANKL & KIRCHNER GMBH & CO KG
SCHEFFELSTRASSE 73 · D-68723 SCHWETZINGEN
TEL.: (06202)2020 · TELEFAX: (06202)202115
E-MAIL: efkad@t-online.de


Efka

OF AMERICA INC.
3715 NORTHCREST ROAD · SUITE 10
ATLANTA · GEORGIA 30340
PHONE: (770)457-7006 · FAX: (770)458-3899
E-MAIL: efkaus@aol.com

Efka

ELECTRONIC MOTORS SINGAPORE PTE. LTD.
67, AYER RAJAH CRESCENT 05-01
SINGAPORE 139950
PHONE: 7772459 or 7789836 · FAX: 7771048
E-MAIL: efkas@cyberway.com.sg

Example For Ordering VARIOSTOP Positioning Drives (Series 80 / 81)

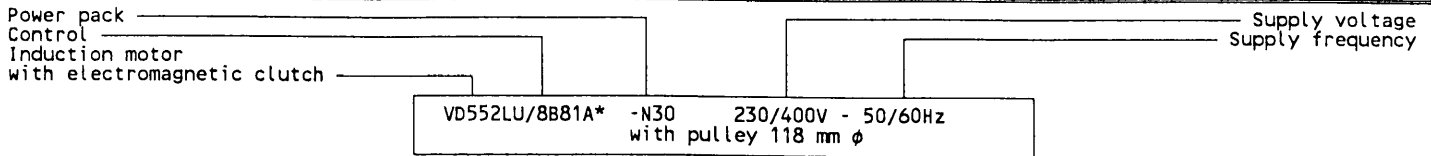


* Besides the type designation, the control nameplate indicates the respective state of development (e.g. 8B81A....Y1). The state of development is only required in the case of technical inquiries or repairs.

Induction Motors With Electromagnetic Clutch

Type	Power Rating (W)	Speed (RPM)	Frequency (Hz)	Type	Power Rating (W)	Speed (RPM)	Frequency (Hz)	Type	Power Rating (W)	Speed (RPM)	Frequency (Hz)
VD374 VD374U VD374LU	370	1400/ 1700	50/ 60	VD742 VD742U VD742LU	740	2800/ 3400	50/ 60	VE374 VE374LU	370	1400/ 1700	50/ 60
VD552 VD552LU	550	2800/ 3400	50/ 60					VE502 VE502LU	500	2900/ 3500	50/ 60
VD554* VD554U* VD554LU*	550	1400/ 1700	50/ 60					VD1102* VD1102U* VD1102LU*	1100	2800/ 3400	50/ 60

* in series with reinforced clutch

Type Code For Induction Motors With Electromagnetic Clutch

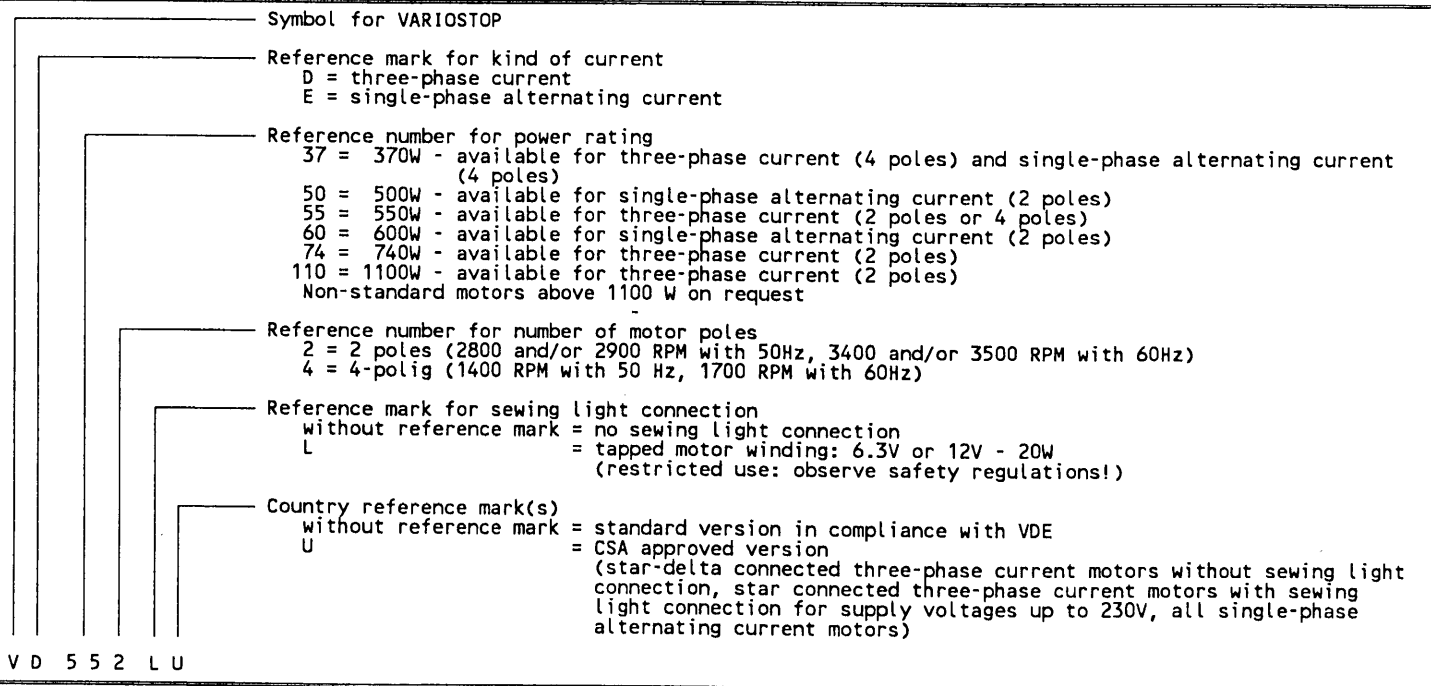

(DOK210995DE)